



DEUDENT



Contents

Deudent BL Implant System	Deudent BL Fixture	4
	Deudent BL System Specifications	5
	Deudent BL Fixture Line	6
Cover Screw&Healing Abutment	Cover Screw	7
	Healing Abutment	
Prosthetic Components	Impression Coping Open Tray	8
	Impression Coping Closed Tray	9
	Lab Anaog	9
	Standard Abutment	10
	Abutment Screw	10
	Adjustable Abutment	11
	Angled Abutment	12
	Stepped Angled Abutment	14
	Ti-Temporary Abutment	17
	Metal-Casting Abutment	17
	Ball Abutment	18
	Locator Abutment	19
	Locator Abutment Accessory	20
	Multiunit Abutment	22
	Multiunit Angled Abutment	23
	Multiunit Impresion Components	24
	Multiunit Abutment Components	25
Digital Components	Ti-Base Abutment	27
	Multiunit Ti-Base	
	Scanbody for Ti-Base Abutment	
	Scanbody for Multiunit Abutment	28
	Digital Analog	
Instruments	Surgical Kit	29
	Prothetic Kit	30


Deudent BL System Specifications

Material

Titanium Grade 4

Micro Threads

Decreases stress on the neck



SLA Surface

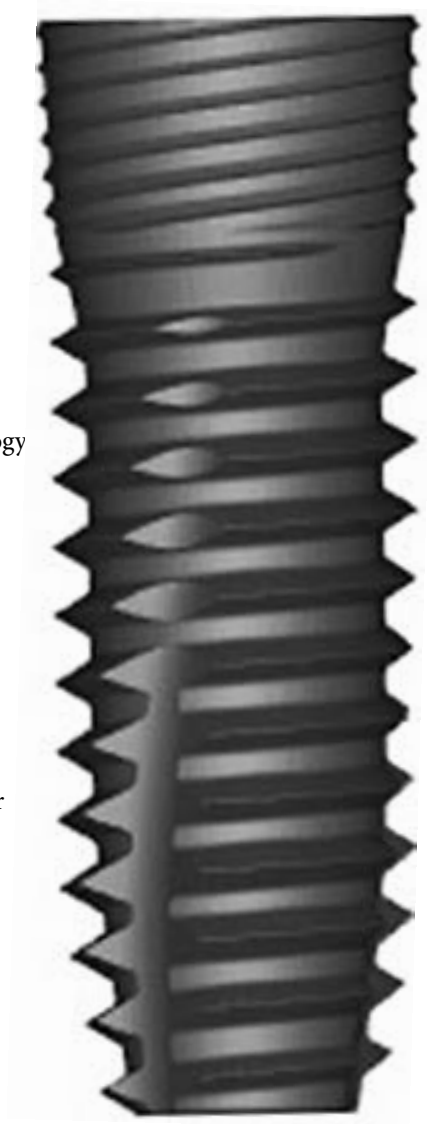
Clinically proven surface technology

Deep Threads

Increases bone contact and primer stability

Cutting Edge

Self tapping blades increase efficiency with less drilling



Platform Switching

Helps to preserve marginal bone

Tapered Design

Easy and smooth insertion
Sharp threads minimize stress on the bone

Straight Body

Decreases bone damage

Tapered Apex

Effective for immediate loading

Taperd

Straight

Tapered

Deudent BL System Specifications

Material

Titanium Grade 5



Coated Sub Gingival Hue


Helps to prevent reflection under the gum for esthetic

Platform Switching

Helps to preserve marginal bone
All abutments fit all fixtures
One size abutment screw


Internal Conical Connection

11° internal hex connection decreases micro movements








Hex Connection

2.5 mm hex connection








Deudent BL Fixture Line






D Ø3.6 Hex 2.5 Body Ø3.4

Length	6	8	10	12	14
					
	BL3606	BL3608	BL3610	BL3612	BL3614






D Ø4.0 Hex 2.5 Body Ø3.8

Length	6	8	10	12	14
					
	BL4006	BL4008	BL4010	BL4012	BL4014

D Ø4.5 Hex 2.5 Body Ø4.3

Length	6	8	10	12	14
					
	BL4506	BL4508	BL4510	BL4512	BL4514


D Ø5.0 Hex 2.5 Body Ø4.8

Length	6	8	10	12	14
					
	BL5006	BL5008	BL5010	BL5012	BL5014

Cover Screw













7

- Single use.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Cover screw is made of Titanium Grade 5.
- Do not use more than 10 N-cm of torque when tightening the cover screw. If the hex is damaged, the slot on the head of the cover screw can be used to rotate it.

Diameter	Ø 3.6	Ref. No.	CSBL	
----------	-------	----------	------	---


Gingiva Former

- Single use. Sterilised.
- Tissue friendly design.
- Gingiva former is made of Titanium Grade 5.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Do not use more than 10 N-cm of torque when tightening the gingiva former. If the hex is damaged, the slot on the head of the gingiva former can be used to rotate it.

Diameter\ G/H	2.0	3.0	5.0
Ø 4.0			
Ref. No.	GF402035S	GF403050M	GF404070L
Ø 4.5			
Ref. No.	GF452035S	GF453050M	GF454070L
Ø 5.5			
Ref. No.	GF552035S	GF553050M	GF554070L
Ø 6.5			
Ref. No.	GF652035S	GF653050M	GF654070L









Impression Components

- Tissue friendly design.
- Screw is included.
- Impression coping is made of Titanium Grade 5.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Do not use rachet to tighten. Tighten by hand.




Impression Coping Open Tray

Diameter\Length

	9	13
Ø 4.0		
Ref. No.	ICOT4009H	ICOT4013H
Ø 4.5		
Ref. No.	ICOT4509H	ICOT4513H
Ø 5.5		
Ref. No.	ICOT5509H	ICOT5513H
Ø 6.5		
Ref. No.	ICOT6509H	ICOT6513

Impression Components

- Tissue friendly design.
- Screw is included.
- Impression coping is made of Titanium Grade 5.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Do not use rachet to tighten. Tighten by hand.




Impression Coping Closed Tray

Diameter\Length	10		15	
Ø 4.0				
	Ref. No.	ICCT4010H	ICCT4015H	
Ø 4.5				
	Ref. No.	ICCT4510H	ICCT4515H	
Ø 5.5				
	Ref. No.	ICCT5510H	ICCT5515H	
Ø 6.5				
	Ref. No.	ICCT6510H	ICCT6515H	
Model Analog	Ref. No.	MAN		

Standard Abutment

- Tissue friendly design with yellow coated hue.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.



Diameter\G/H	1.0	2.0	3.0	4.0	5.0	6.0
Ø 4.0						
Ref. No.	STAB4010H	STAB4020H	STAB4030H	STAB4040H	STAB4050H	STAB4060H
Ø 4.5						
Ref. No.	STAB4510H	STAB4520H	STAB4530H	STAB4540H	STAB4550H	STAB4560H
Ø 5.5						
Ref. No.	STAB5510H	STAB5520H	STAB5530H	STAB5540H	STAB5550H	
Ø 6.5						
Ref. No.	STAB6510H	STAB6520H	STAB6530H	STAB6540H	STAB6550H	

Abutment Screw


Ref. No.

ABSC




Adjustable Abutment

- Tissue friendly design with yellow coated hue.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titantium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.



Diameter\G/H	1.0	2.0	3.0
Ø 4.0	 ± 1.0	 ± 2.0	
Ref. No.	ADAB4010H	ADAB4020H	
Ø 4.5	 ± 1.0	 ± 2.0	
Ref. No.	ADAB4510H	ADAB4520H	
Ø 5.5	 ± 1.0	 ± 2.0	
Ref. No.	ADAB5510H	ADAB5520H	
Ø 6.5	 ± 1.0	 ± 2.0	 ± 3.0
Ref. No.	ADAB6510H	ADAB6520H	ADAB6530H
Ø 7.5		 ± 2.0	 ± 3.0
Ref. No.		ADAB7520H	ADAB7530H

Angled Abutment 15°





A type



B type

- Tissue friendly design with yellow coated hue.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter\G/H

1.0**3.0****5.0****Ø 4.5**

Ref. No.

ANAB154510A

ANAB154530A



ANAB154550A

Ref. No.

ANAB154510B

ANAB154530B

ANAB154550B

Ø 5.5

Ref. No.

ANAB155510A

ANAB155530A

ANAB155550A

Ref. No.

ANAB155510B

ANAB155530B

ANAB155550B

Angled Abutment 25°









- Tissue friendly design with yellow coated hue.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter\G/H		1.0	3.0	5.0
Ø 4.5				
	Ref. No.	ANAB254510A	ANAB254530A	ANAB254550A
	Ref. No.	ANAB254510B	ANAB254530B	ANAB254550B
Ø 5.5				
	Ref. No.	ANAB255510A	ANAB255530A	ANAB255550A
	Ref. No.	ANAB255510B	ANAB255530B	ANAB255550B

Stepped Angled Abutment 15°









- Tissue friendly design with yellow coated hue.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter\G/H	1.0	3.0	5.0
Ø 4.5			
Ref. No.	ANAB154510AS	ANAB154530AS	ANAB154550AS
Ref. No.	ANAB154510BS	ANAB154530BS	ANAB154550BS
Ø 5.5			
Ref. No.	ANAB155510AS	ANAB155530AS	ANAB155550AS
Ref. No.	ANAB155510BS	ANAB155530BS	ANAB155550BS


Stepped Angled Abutment 25°



- Tissue friendly design with yellow coated hue.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter\G/H	1.0	3.0	5.0
Ø 4.5			
Ref. No.	ANAB254510AS	ANAB254530AS	ANAB254550AS
Ref. No.	ANAB254510BS	ANAB254530BS	ANAB254550BS
Ø 5.5			
Ref. No.	ANAB255510AS	ANAB255530AS	ANAB255550AS
Ref. No.	ANAB255510BS	ANAB255530BS	ANAB255550AS

Stepped Angled Abutment 30°






A type



B type

- Tissue friendly design with yellow coated hue.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter\G/H

1.0**3.0****5.0****Ø 4.5**

Ref. No.

ANAB304510AS

ANAB304530AS




ANAB304550AS

Ref. No.

ANAB304510BS

ANAB304530BS

ANAB304550BS

Ø 5.5

Ref. No.

ANAB305510AS

ANAB305530AS

ANAB305550AS


Ref. No.

ANAB305510BS

ANAB305530BS

ANAB305550BS

Ti-Temporary Abutment




- Tissue friendly design.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter\G/H		1.0	3.0	5.0
--------------	--	-----	-----	-----

Ø 4.5	Ref. No.	TMPAB4510H	TMPAB4520H	TMPAB4530H	Hex
	Ref. No.	TMPAB4510N	TMPAB4520N	TMPAB4530N	Non-Hex

Metal-Casting Abutment



- Tissue friendly design.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Abutment screw is included.
- Abutment is made of Titanium Grade 5
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter\G/H		1.0
--------------	--	-----

Ø 4.5	Ref. No.	MCAB45H	Hex
	Ref. No.	MCAB45N	Non-Hex

Ball Abutment

Ball Abutment Diameter
Ø 3.5 mm



- Tissue friendly design.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter \ G/H	1.0	2.0	3.0	4.0	5.0
Ø 3.5					
Ref. No.	BAB10	BAB20	BAB30	BAB40	BAB50

Ball Abutment Analog

Ref. No.	MANBA

Female Socket

Diameter		
Ø 4.05	Ref. No.	FSBA
	Retention Force	500 - 700 gt (1.10–1.54 lbf)

Plastic Cap for Ball Attachment

Diameter			
Ø 4.05	Ref. No.	PCBAW	PCBAP
	Retention Force	300 - 500 gt (0.66–1.10 lbf)	500 - 700 gt (1.10–1.54 lbf)

Locator® Abutment



- Tissue friendly design with yellow coated hue.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter \ G/H		1.0	2.0	3.0	4.0	5.0
Ø 3.85		Ø 3.85	Ø 3.85	Ø 3.85	Ø 3.85	Ø 3.85
	Ref. No.	08656	08657	08658	08659	08660

Locator® Impression Coping (4/pk)

Ref. No. 08505



Locator® Analog (4/pk)

Ref. No. 08530



Locator® Abutment Accessory

· Compatible with all diamters of Deudent BL Dental Implant System.

Locator® Processing Package (2/pk)

Type	Ref. No.
Standard (Up to 10° Angle Correction / 20° Between Two Implants)	08519-2
Extended (Up to 20° Angle Correction / 40° Between Two Implants)	08540-2




Locator® Spacer

Type	Ref. No.
Block-out Spacer (20/pk)	08514
Processing Spacer (4/pk)	08569




Locator® Denture Cap Assembly (4/pk)

Type	Ref. No.
Denture Cap Assembly	08510-4
Black Processing Male	08515




Locator® Standard Range Replacement Males (4/pack)

Pivot	Retention	Color	Ref. No.
±10°	Low (680 gf, 1.5 lbs)	Blue	08529
	Medium (1361 gf, 3.0 lbs)	Pink	08527
	High (2268 gf, 5.0 lbs)	Clear	08524

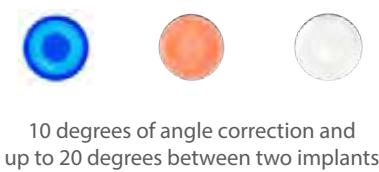

Locator® Extended Range Replacement Males (4/pack)

Pivot	Retention	Color	Ref. No.
±20°	Zero (0 gf, 0 lbf)	Grey	08558
	Low (454 gf, 1.0 lbf)	Red	08548
	Medium (907 gf, 2.0 lbf)	Orange	08915
	High (1814 gf, 4.0 lbf)	Green	08547

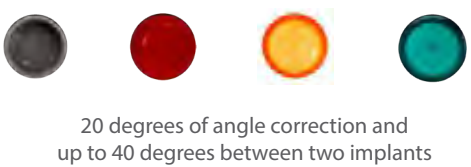


Locator® Abutment Tool

- Compatible with all diamters of Deudent BL Dental Implant System.

Drivers

Type	Length	Ref. No.
Locator® Torque	15	08926
Wrench Driver	21	08927




Tools

Type	Ref. No.
Locator® Core Tool	08393
Locator® Core Tool Tip	08397
Locator® Abutment Holder Sleeve (4/pk)	08394
Dentium Torque Wrench	XNTW
Locator® Angle Measurement Guide	09530
Locator® Parallel Post	08517







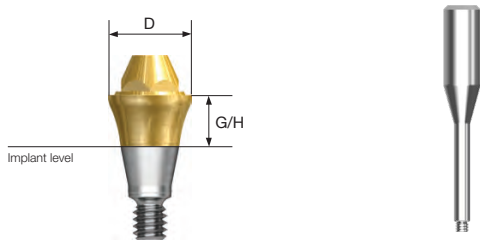

Locator® Core Tool

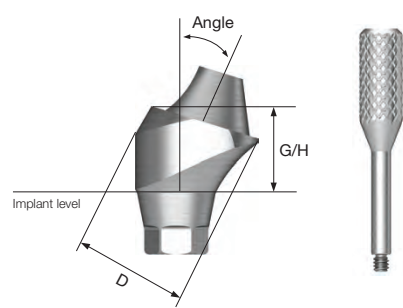
Multiunit Abutment













- Tissue friendly design.
- Compatible with all diameters of Deudent BL Dental Implant System.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Diameter \ G/H		1.0	1.5	2.5	3.5	4.5	5.5
Ø 4.8		 ± 1.0	 ± 1.5	 ± 2.5	 ± 3.5	 ± 4.5	 ± 5.5
	Ref. No.	MUAB4810	MUAB4815	MUAB4825	MUAB4835	MUAB4845	MUAB4855

Multiunit Angled Abutment



- Tissue friendly design.
- Compatible with all diamters of Deudent BL Dental Implant System.
- Abutment is made of Titanium Grade 5.
- Tighten with 30–35 N.cm. Retighten with the same torque after 15 minutes to prevent screw loosening.

Angle \ G/H	1.5	2.5	3.0	4.0	5.0	
17°						
	Ref. No. MUANAB174815H	MUANAB174825H	MUANAB174830H	MUANAB174840H	MUANAB174850H	Hex
	Ref. No. MUANAB174815N	MUANAB174825N	MUANAB174830N	MUANAB174840N	MUANAB174850N	Non-Hex
30°						
	Ref. No. MUANAB304815H	MUANAB304825H	MUANAB304835H	MUANAB304840H	MUANAB304850H	Hex
	Ref. No. MUANAB304815N	MUANAB304825N	MUANAB304835N	MUANAB304840N	MUANAB304850N	Non-Hex






Multiunit Abutment Impression Components

- Compatible with all diamters of Deudent BL Dental Implant System.

Impression Coping Open Tray

	Hex	Non-Hex
		
Ref. No.	ICOTMUA48H	ICOTMUA48N

Impression Coping Open Tray Pin

					
Length	5	10	12	15	
Ref. No.	ICOTSC05	ICOTSC10	ICOTSC12	ICOTSC15	

Impression Coping Closed Tray

	Non-Hex
	
Ref. No.	ICCTMUA48N

Multiunit Abutment Components

- Compatible with all diamters of Deudent BL Dental Implant System.

Comfort Cap

Ref. No.



CCMUA

Model Analog

Ref. No.



MANMUA

Ti-Retaining Screw

Ref. No.



MUARS

Plastic Cylinder


Ref. No.

Hex



MUAPCH

Non-Hex



MUAPCN

Multiunit Abutment Components

- Compatible with all diamters of Deudent BL Dental Implant System.

Temporary Abutment

D \ Type	Hex	Non-Hex
Ø 4.8		
Ref. No.	MUATMPCH	MUATMPCH

Ti-Cap

D \ Type	Hex	Non-Hex
Ø 4.8		
Ref. No.	MUATC45H	MUATC45N













Metal Casting

D \ Type	Hex	Non-Hex
Ø 4.8		
Ref. No.	MUAMCH	MUAMCN




Digital Components

- Compatible with all diameters of Deudent BL Dental Implant System.
- Abutment screw is included

Ti-Base Abutment

Diameter \ G/H		1.0	1.5	2.5	3.5	4.5	5.5	
								
Ø 4.1	Ref. No.	TBA4505H	TBA4515H	TBA4525H	TBA4535H	TBA4545H	TBA4555H	Hex
								
	Ref. No.	TBA4505N	TBA4515N	TBA4525N	TBA4535N	TBA4545N	TBA4555N	Non-hex

Ti-Base | Multi Unit

H \ Degree	5°	10°
4		
	Ref. No. MUATB0504	MUATB1004
6		
	Ref. No. MUATB0506	


Digital Impression Components

- Compatible with all diamters of Deudent BL Dental Implant System.
- Abutment screw is included.

Scan Body | for Ti-Base Abutments

Ref. No.

SBTBA



Scan Body | for Multiunit Abutment

Ref. No.

SBMUA



Digital Analog

Ref. No.


MAND



Digital Analog | for Multiunit Abutment

Ref. No.

























MANMUAD



Instruments

Surgical Kit Ref. No. BLSK

Kit Components

		Ref. No.				Ref. No.
• First guide drill		FGDS	(Stopper)	• Parallel pin x4		PLP
• Second guide drill		SGDS	(Stopper)	• Hand-piece adapter	 	IDHPAS IDHPAL
• Final drill (Stopper)		FDS36	(Stopper)	• Ratchet adapter		IDRAS
		FDS40	(Stopper)			IDRAL
		FDS45	(Stopper)			
		FDS50	(Stopper)			
• Final drill		FD36		• Path pin x2		PTP
		FD40		• Hex driver		HDRVL
		FD45		• Drill extension		DREX
		FD50				
• Countersink		CS36		• Depth gauge		DPTHG
		CS40				
		CS45		• Ratchet		RCHT
		CS50				

Prosthetic Kit

Ref. No. BLPK

Hex Driver Short



Ref. No. HDRVS

Hex Driver Long



Ref. No. HDRVL

Torque Ratchet



Ref. No. TRCHT

Multiunit Abutment Adapter



Ref. No. MUAADPR

PRODUCT CATALOG

Deudent Medical GmbH

Leibnizstr. 17 74211 Leingarten / Germany www.deudent.de info@deudent.de